


*ITALIAN QUALITY PRODUCT*



Modular cold  
rooms for  
refrigerated  
warehouse

**COM-CMR**

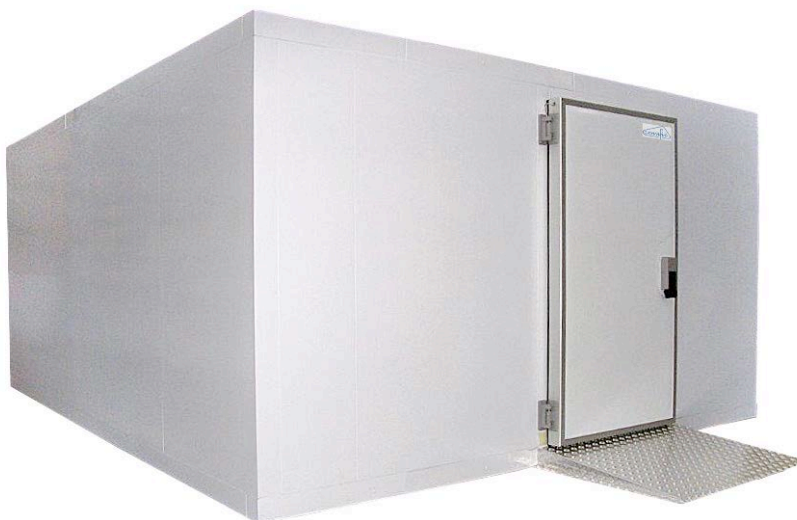

**COMFIT srl**

Via Viberti, 4

10141 Torino - Italy

T. +39 011 720085

F.+39 011 728870

[comfit@tiscali.it](mailto:comfit@tiscali.it)

[www.comfit.org](http://www.comfit.org)

Subject to change without notice  
the technical characteristics of  
the products shown. All rights  
reserved. COMFIT srl, 05/2014

*Aria nuova in laboratorio...*

# ITALIAN QUALITY PRODUCT

The COMFIT coldrooms are designed using a modular panel system, along with the standard modules customized modules are available.

## Insulation

High density  
polyurethane foam 40-42  
kg/mc, fire retarding  
according ISO 3582, CFC  
free.

Thermal conductivity  
coefficient Lambda

0,021W/mq °K


Transfer coefficient K.

Thicknesses 70 mm 3,30  
W/mq °K

Thicknesses 100 mm  
0,21 W/mq °K

Thicknesses 130 mm  
0,16 W/mq °K


Compression resistance  
1,5 – 2 Kg/cmq



## Height panels

Standard cm 203-223-  
243-263-283-303-323

They are panels with  
heights of measurement.

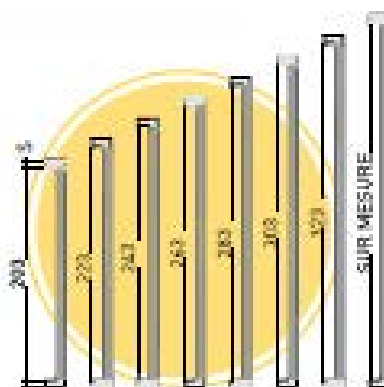

## Interior partitions.

May be:

Movable dividing.

Cam locks dividing



## COMFIT srl

Via Viberti, 4

10141 Torino - Italy

T. +39 011 720085

F. +39 011 728870

[comfit@tiscali.it](mailto:comfit@tiscali.it)

[www.comfit.org](http://www.comfit.org)

Subject to change without notice  
the technical characteristics of  
the products shown. All rights  
reserved. COMFIT srl, 05/2014

*Aria nuova in laboratorio...*

# ITALIAN QUALITY PRODUCT

## Inside rounded corners

It is possible to produce panels with rounded corners both for floor and walls.



## Locking panels.

Male -Female nesting.  
Connection with dual effect cam locks.



## Type flooring cold rooms.

Galvanized steel sp. 7/10 mm thick  
with non-slip grey plating coating  
walk-in static load 2000kg/mq.

Stainless steel sheet 18/10 AISI  
304 sp 6/10 mm.

Stainless steel sheet 18/10 AISI  
304 no-slip punch thick 6/10 mm  
walk-in static load 2000kg/mq.

Suitable for trolley 250 kg  
reinforced with 10 mm fenolic  
multistratified wood.

Suitable for trolley 1000 kg  
reinforced with 12 mm fenolic  
multistratified wood, wood beams  
support 3 mm aluminium sheet  
cover.



## Panels finishing.

Galvanized sheet steel sp. 6/10  
with plastic coating in rigid white  
PVC 120 micron thick non toxic.

Galvanized sheet with plastic  
coating in different colours.

Stainless steel sheet 18/10 AISI  
304 sp 6/10 mm scotch brigt/dull  
external, natural finish inside.



## COMFIT srl

Via Viberti, 4

10141 Torino - Italy

T. +39 011 720085

F.+39 011 728870

[comfit@tiscali.it](mailto:comfit@tiscali.it)

[www.comfit.org](http://www.comfit.org)

Subject to change without notice  
the technical characteristics of  
the products shown. All rights  
reserved. COMFIT srl, 05/2014

*Aria nuova in laboratorio...*



# ITALIAN QUALITY PRODUCT

We present some types of doors  
for cold rooms.

**Doors for cold rooms.**

Access door - service door.



Sliding door.



Steel sliding door with electric  
opening.



**COMFIT srl**  
Via Viberti, 4  
10141 Torino - Italy  
T. +39 011 720085  
F. +39 011 728870  
[comfit@tiscali.it](mailto:comfit@tiscali.it)  
[www.comfit.org](http://www.comfit.org)

Subject to change without notice  
the technical characteristics of  
the products shown. All rights  
reserved. COMFIT srl, 05/2014

*Aria nuova in laboratorio...*