


ITALIAN QUALITY PRODUCT



Custom cold
rooms for
special process
plant.

COM-CSP

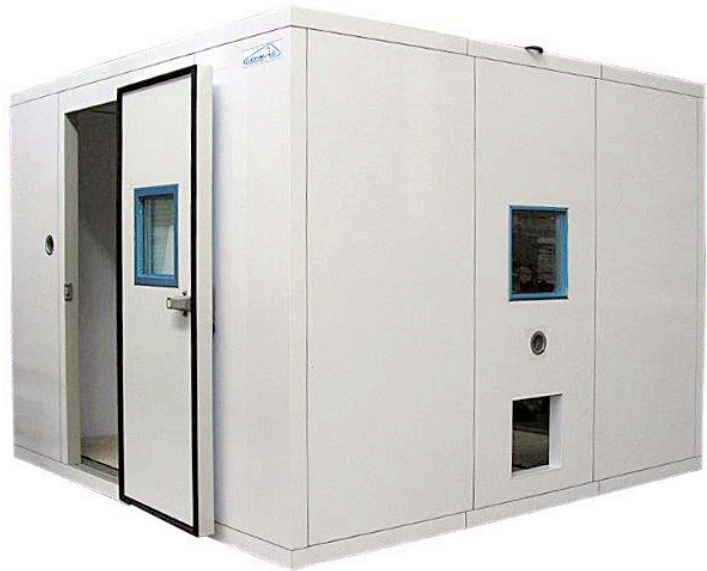

COMFIT srl
Via Viberti, 4
10141 Torino - Italy
T. +39 011 720085
F. +39 011 728870
comfit@tiscali.it
www.comfit.org

Subject to change without notice
the technical characteristics of
the products shown. All rights
reserved. COMFIT srl, 05/2014

Aria nuova in laboratorio...

ITALIAN QUALITY PRODUCT

Our design and production flexibility allows custom cold rooms for special process plant on custom needs.

Insulation

High density
polyurethane foam 40-42
kg/mc, fire retarding
according ISO 3582, CFC
free.

Thermal conductivity
coefficient Lambda

0,021W/mq °K


Transfer coefficient K.

Thicknesses 70 mm 3,30
W/mq °K

Thicknesses 100 mm
0,21 W/mq °K

Thicknesses 130 mm
0,16 W/mq °K


Compression resistance
1,5 – 2 Kg/cmq



Height panels

Standard cm 203-223-
243-263-283-303-323

They are panels with
heights of measurement.

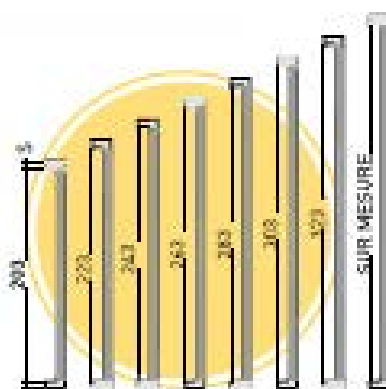

Interior partitions.

May be:

Movable dividing.

Cam locks dividing



COMFIT srl

Via Viberti, 4

10141 Torino - Italy

T. +39 011 720085

F. +39 011 728870

comfit@tiscali.it

www.comfit.org

Subject to change without notice
the technical characteristics of
the products shown. All rights
reserved. COMFIT srl, 05/2014

Aria nuova in laboratorio...

ITALIAN QUALITY PRODUCT

Inside rounded corners

It is possible to produce panels with rounded corners both for floor and walls.



Locking panels.

Male -Female nesting.
Connection with dual effect cam locks.



Type flooring cold rooms.

Galvanized steel sp. 7/10 mm thick
with non-slip grey plating coating
walk-in static load 2000kg/mq.

Stainless steel sheet 18/10 AISI
304 sp 6/10 mm.

Stainless steel sheet 18/10 AISI
304 no-slip punch thick 6/10 mm
walk-in static load 2000kg/mq.

Suitable for trolley 250 kg
reinforced with 10 mm fenolic
multistratified wood.

Suitable for trolley 1000 kg
reinforced with 12 mm fenolic
multistratified wood, wood beams
support 3 mm aluminium sheet
cover.



Panels finishing.

Galvanized sheet steel sp. 6/10
with plastic coating in rigid white
PVC 120 micron thick non toxic.

Galvanized sheet with plastic
coating in different colours.

Stainless steel sheet 18/10 AISI
304 sp 6/10 mm scotch brigt/dull
external, natural finish inside cell.



COMFIT srl

Via Viberti, 4
10141 Torino - Italy
T. +39 011 720085
F.+39 011 728870

comfit@tiscali.it

www.comfit.org

Subject to change without notice
the technical characteristics of
the products shown. All rights
reserved. COMFIT srl, 05/2014

Aria nuova in laboratorio...

ITALIAN QUALITY PRODUCT

We present some types of doors
for cold rooms

Doors for cold rooms.

Access door - service door.



Sliding door.



Steel sliding door with electric
opening.



COMFIT srl
Via Viberti, 4
10141 Torino - Italy
T. +39 011 720085
F. +39 011 728870
comfit@tiscali.it
www.comfit.org

Subject to change without notice
the technical characteristics of
the products shown. All rights
reserved. COMFIT srl, 05/2014

Aria nuova in laboratorio...